

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 18/45 E



Convenient

Start at the push of a button, low hand/arm vibrations, no exhaust emission



Robust and proven

Optimally protected, maintenance-free engine, full V-belt protection




Straightforward handling

Battery change, guide handle folding, etc. can be carried out without tools

Shipping dimensions in m3

BP 18/45 E

0,141

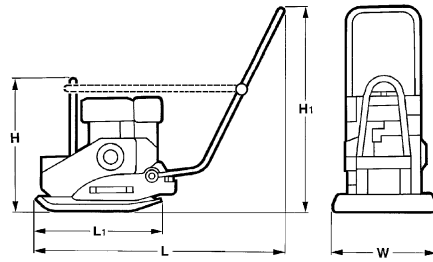

Standard Equipment

- Comfort start
- Maintenance-free brushless electric motor
- Tool-free battery swap
- Protective covering
- Vibration insulated steering handle, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty

Optional Equipment

- Battery eP 20 (20Ah)
- Battery eP 28 (28Ah)
- Standard charger
- Quick charger
- Sprinkler system (+7kg)
- Transport wheels (+4kg)
- Plastic mat
- Service Kit
- Special painting

Dimensions in mm

	H	H1	L	L1	W
BP 18/45 E	560	932	1190	558	450

Technical Data

**BOMAG
BP 18/45 E**

Weights

Operating weight CECE	kg	97
Basic weight	kg	87

Dimensions

Working width	mm	450
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine type		Asynchronous motor
Emission stage		no emissions
Cooling		air
Performance	kW	3,1
Speed	min-1	4.350
Drive system		electric

Exciter system

Frequency	Hz	90
Centrifugal force	kN	18
Amplitude	mm	1,85

Capacities

Water	l	7,0
-------------	---	-----

Electric equipment

battery, type		Li-Ion
Operating voltage	V	51
battery, type		Li-Ion
Operating voltage	V	51

Technical modifications reserved. Machines may be shown with options.



PRE 630 18 010

030924 Sa01

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

