

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BR 95



Safe loading and unloading

Single point lifting device and optional transport wheels



Robust machine design

Engine protection guard and cyclone air pre-filter




Comfortable ride and handling

Low HAV (<math><2.5\text{m/s}^2</math>), comfortable driving grip and good driving characteristics

Shipping dimensions in m3

BR 95

0,220

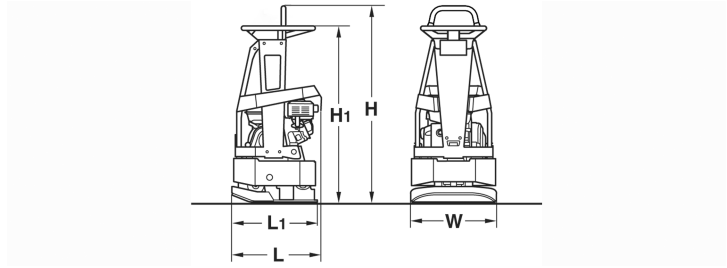

Standard Equipment

- Vibration damped comfort handle
- Highly wear resistant base plate
- Recoil starter
- Engine protection frame
- Single point lifting device
- additional large single-point suspension (removable)
- 3-2-1 Warranty
- Automatic shutdown at low oil level
- Fully protected V-belt

Dimensions in mm

	H	H1	L	L1	W
BR 95	1030	930	475	450	450

Technical Data

BOMAG

BR 95

Optional Equipment

- Transport wheels
- Special painting
- Tool kit
- Service Kit
- Tough Warranty

Weights

Operating weight CECE	kg	92
Basic weight	kg	90

Dimensions

Working width	mm	450
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 160
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 3,5
Speed	min-1 3.400
Drive system	mech.
Fuel	Gasoline
Fuel consump. aver. during operation	l/h 1,1

Exciter system

Frequency	Hz	90
Centrifugal force	kN	15
Amplitude	mm	1,6

Capacities

Fuel	l	3,1
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 630 21 010

210122 Sa01

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

