

# TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 10/36



**Compact**

Guide handle fully foldable



**Robust and reliable**

V-belt all around protected against damage




**Safe transport**

Transport handles (standard) and transport wheels (optional)

**Shipping dimensions in m3**

**BVP 10/36**

0,146

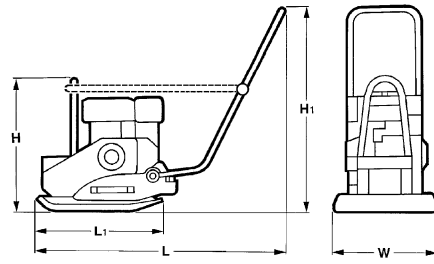

**Standard Equipment**

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty

**Optional Equipment**

- Sprinkler system (+7kg)
- Transport wheels (+4kg)
- Plastic mat
- Tool kit
- Service Kit
- TOUGH WARRANTY
- Comfort guide handle
- Special painting
- Engine protection frame

**Dimensions in mm**

	H	H1	L	L1	W
<b>BVP 10/36</b>	535	915	1115	558	360

**Technical Data**

**BOMAG  
BVP 10/36**

**Weights**

Operating weight CECE .....	kg	83
Basic weight .....	kg	82

**Dimensions**

Working width .....	mm	360
---------------------	----	-----

**Driving Characteristics**

Working speed, max. ....	m/min	25
Max. gradeability (dep. on soil con.) .....	%	30

**Drive**

Engine manufacturer .....	Honda
Type .....	GX 120
Emission stage .....	Stage V / CARB P.3
Cooling .....	air
Number of cylinders .....	1
Performance SAE J 1349 .....	kW 2,6
Speed .....	min-1 3.600
Drive system .....	mech.
Fuel .....	Gasoline
Fuel consump. aver. during operation .....	l/h 0,9

**Exciter system**

Frequency .....	Hz	90
Centrifugal force .....	kN	10
Amplitude .....	mm	1,36

**Capacities**

Fuel .....	l	2,0
Water .....	l	7,0

Technical modifications reserved. Machines may be shown with options.



PRE 834 13 010

030423 Sa03

**BOMAG**  
Hellerwald  
D-56154 Boppard  
P.O. Box 5162  
Tel. (0)6742 - 1000  
Fax (0)6742 - 3090

